




Productos de Fibra y Concreto S.A. de C.V.

DATA  
SHEET

**SUPER 1730**  
**Tier 15 ANSI**

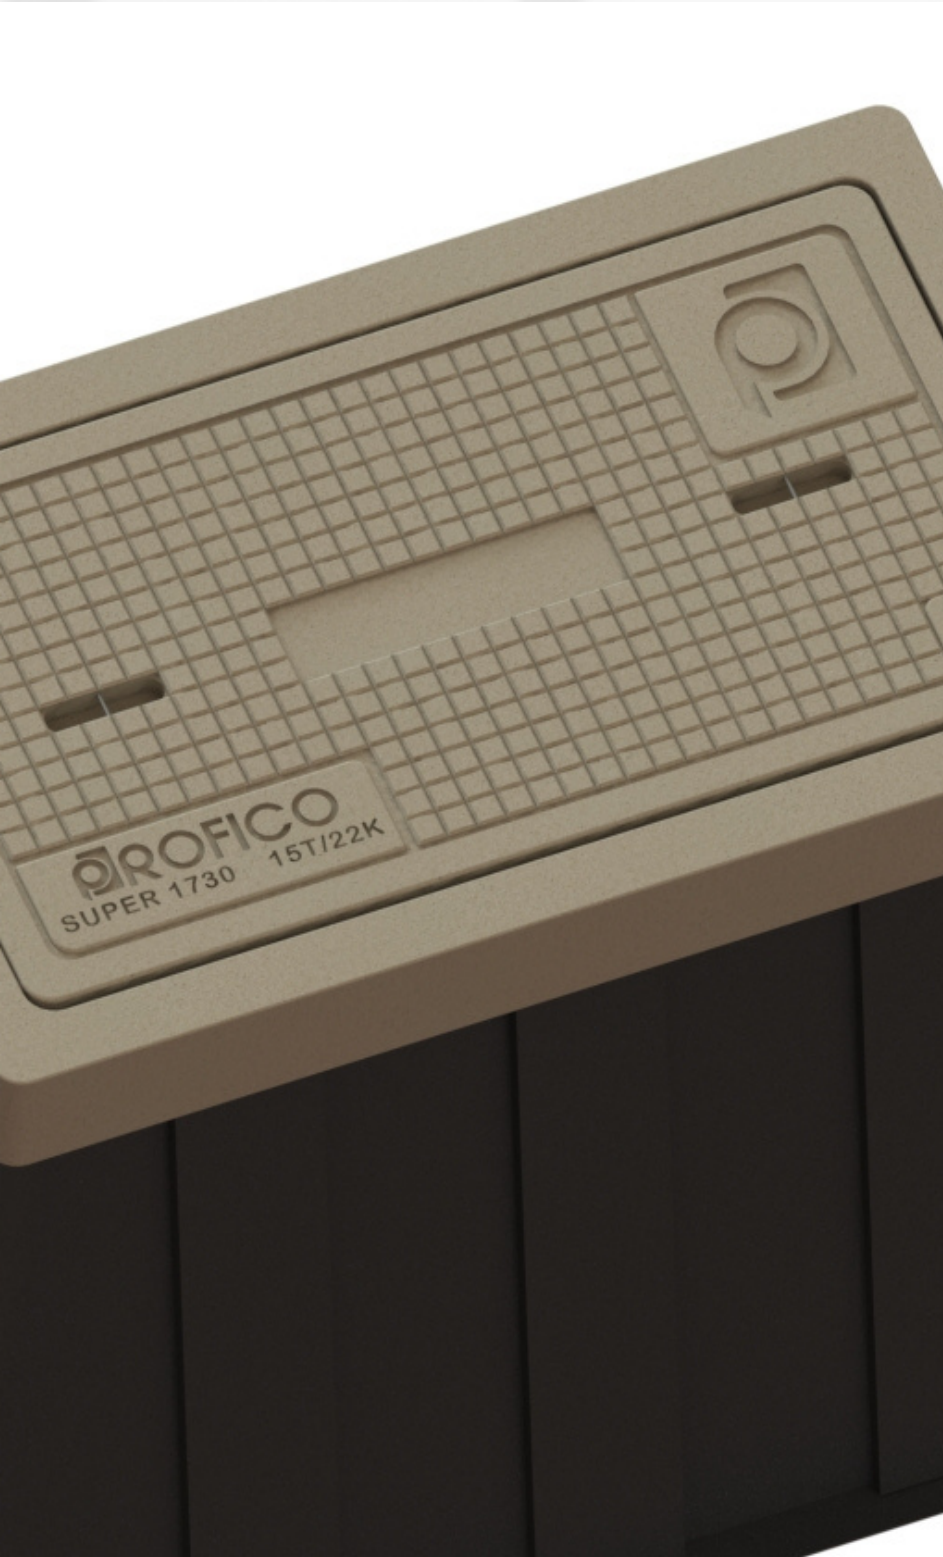

## DESCRIPTION

---

Underground Pull Box  
Combination of a fiberglass  
base with a polymer  
concrete ring and cover

## HANDLING

---


Contractor friendly; lighter  
than 100% polymer boxes,  
flared design offers greater  
working area compared to  
straight walled units

## INSTALLATION


---

Easy to field adapt.


## DIMENSIONS 17 X 30 X 24 IN

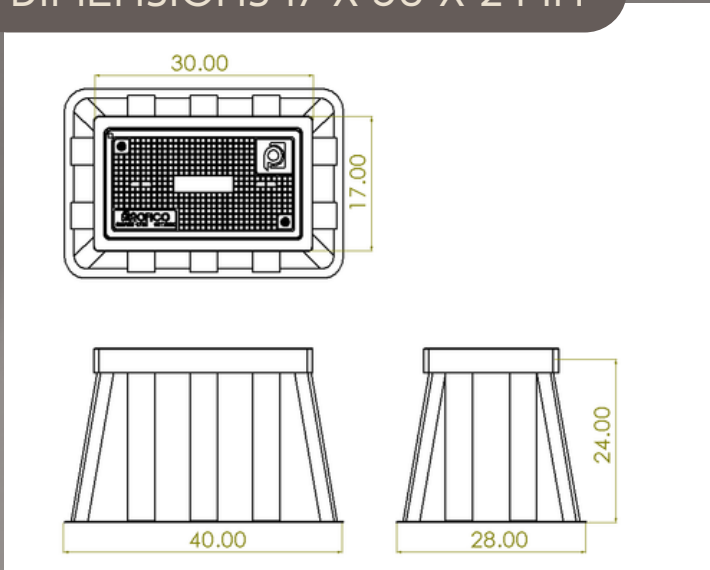

0% ANTICORROSIVE MATERIALS

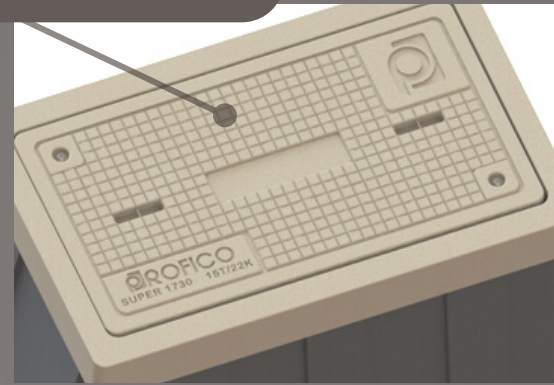

ID CUSTOMER SPACE

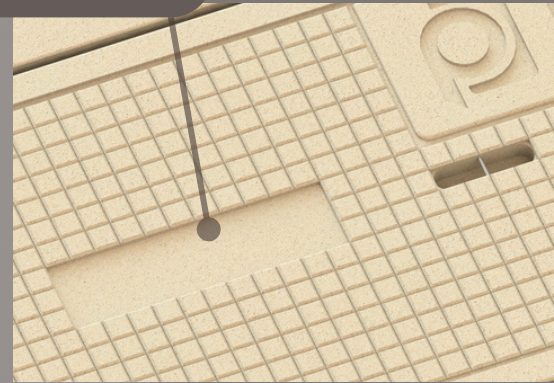


## ESPECIFICACIONES / SPECS

- Construido con concreto polimérico y cuerpo en fibra de vidrio.
- Resistencia del 800 Kgs/cm<sup>2</sup>.
- Sin fondo para dren de agua
- Marco en concreto polimérico
- Jaladera inoxidable
- Indicadores en tapa de Alumbrado, Sistema de Tierras o fibra óptica
- Opción diseño personalizado de la tapa según logotipo del cliente.
- Capacidad de carga: Trafico ocasional no intencional Tier 15
- Peso aproximado registro y tapa 60 Kgs
- Constructed with polimeric concrete and fiber.
- Resistance of 11378 psi
- Without bottom water sink use
- Polimeric concrete frame
- Stainless Steel drop handle
- Indicators on the cover of Power, Ground Fiber optics
- Custom design option for the lid according to the client's logo.
- Load rating: Heavy traffic rated 22500 lbs ANSI TIER 15 compliance
- Approximate weight pull box and cover 132 lbs

STAINLES STEEL HANDLER



STAINLESS STEEL SCREW

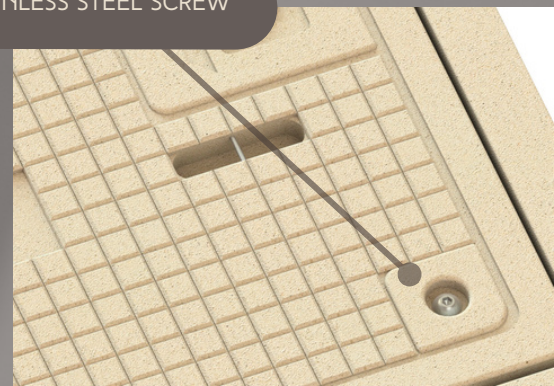

# PROFICO

Productos de Fibra y Concreto S.A. de C.V.

## Contact